


FORTIDE®-ST

Product information



Two-component epoxy coating with a wide range of applications

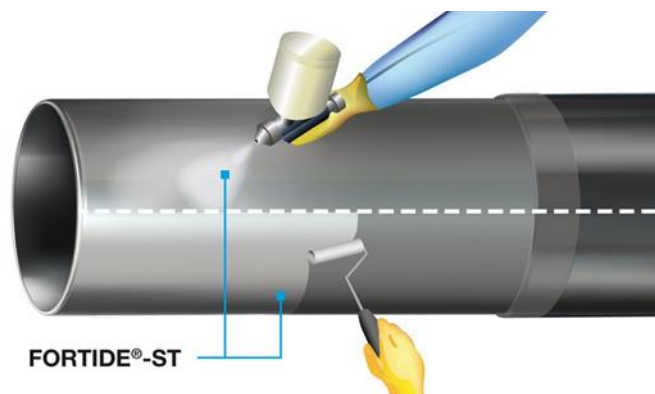

Specific advantages:



For operating temperatures up to +95 °C (+203 °F).



Fulfils ISO21809-3, type 18-A.



Free from volatile solvents and isocyanates.



Brush or spray application



Outstanding resistance against cathodic disbondment.

Product description

FORTIDE®-ST is a thick film epoxy coating that provides durable corrosion prevention for buried and submerged pipelines.

FORTIDE®-ST features **outstanding hardness** while also providing **good abrasion resistance**.

FORTIDE®-ST is particularly suitable for protecting joints, complete pipes or **restoring whole pipelines**.

FORTIDE®-ST covers a very broad range of applications, thanks to its ease of use in a variety of ways.

The product is available in both spray and brush variants.

The isocyanate- and solvent-free system ensures compliance **with the most stringent environmental and health and safety requirements**.

FORTIDE®-ST fulfils the requirements of **ISO 21809-3, type 18A**.

The coating's durability is a result of its excellent **resistance to cathodic disbondment** combined with **exceptional indentation strength**.

FORTIDE®-ST is available in different package sizes, which means that a practical and economical size is available depending on the requirements of the project.

Typical product properties

Property	Unit	Typical value	Required value	Test method
Type	-	two components	-	ISO 21809-3
Colour	-	grey	-	
Recommended minimum layer thickness	µm	≥ 600	-	
Theoretical consumption for 600 µm DFT	kg/m ² l/m ²	0.86 0.60	-	
Indentation resistance (10 N/mm ² , stamp-Ø 1.8mm)	+95 °C (+203 °F)	% of the original thickness	≤ 5	≤ 30
Cathodic disbondment	+23 °C (+73 °F)	mm	≤ 2	≤ 8
	+95 °C (+203 °F)		≤ 8	≤ 15
Hardness	+23 °C (+73 °F)	Shore D	≥ 80	-
Adhesion	EP on steel	MPa	≥ 18	≥ 10
	EP on EP		≥ 14	≥ 7
Adhesion after hot water immersion (28 d / +95 °C / +203 °F)	EP on steel		≥ 14	≥ 7
	EP on EP		≥ 8	≥ 2

Processing conditions

Brush variant				
Ambient and substrate temperature approx.		+10 °C (+50 °F)	+20 °C (+68 °F)	+40 °C (+104 °F)
Small package (brush variant)	Pot life (250 g total mass)	approx. 50 min.	approx. 16 min.	approx. 5 min.
	Tack-free	approx. 3 h	approx. 1 h	approx. 25 min.
	durable	approx. 22 h	approx. 6 h	approx. 1.5 h
Hot airless spray application				
Ambient and substrate temperature approx.		+10 °C (+50 °F)	+20 °C (+68 °F)	+55 °C (+131 °F)
Hobbock (hot airless spraying)	Tack-free	approx. 1.5 h	approx. 45 min.	approx. 5 min.
	durable	approx. 13 h	approx. 4 h	approx. 30 min.
General processing conditions				
Processing temperature	Substrate	≥ +10 °C (≥ +50 °F); min. +3 °C (+5.4 °F) above the dew point		
	Environment	-40 °C to +50 °C (-40 °F to +122 °F)		
Steel surface	Degree of cleanliness (ISO 8501-1)	min. Sa 2 ½		
	surface roughness (ISO 8503-1)	40 – 100 µm		
Relative humidity	≤ 80 %			

Ordering information and packaging

Product name	Component Packaging	Contents per package approx.		Content per box
		[l]	[kg]	[pcs.]
FORTIDE®-ST 0.8 l Kit	Comp. A / B (cans)	0.6 / 0.2	0.9 / 0.2	12 / 12
FORTIDE®-ST 1.2 l Kit	Comp. A / B (cans)	0.9 / 0.3	1.4 / 0.3	8 / 8
FORTIDE®-ST	Comp. A / B (hobbock)	29 / 29	45 / 29	-
	Comp. A / B (barrel)	207 / 207	325 / 207	-

Storage

FORTIDE®-ST can be stored in its unopened original packaging for at least 12 months from the date of manufacture. Storage temperature: +5 °C (+41 °F) to +30 °C (+86 °F). Store in a dry and frost-free location.

DEKOTEC GmbH

Felderstrasse 24 | 51371 Leverkusen | Germany
Phone: +49 214 2602-0 | info@dekotec.com
www.dekotec.com

Our product information, application recommendations and other printed publications provide advice to the best of our knowledge and indicate our level of knowledge at the time of printing. The content is not legally binding. Therefore, no liability is assumed for incorrect and missing advice. The applicator is obliged to check the suitability and possibility of application for the intended purpose. Unless otherwise specified, all of the brands named are trademarks, at least registered in Germany, which are protected by law.

Only our general terms and conditions of sale, which you will find at www.dekotec.com, apply. This is a translation from the original German product information. In case of any discrepancy or any dispute arising on the interpretation, the German text of the respective German product information, shall be decisive. The legal relationship shall be governed by German law.